


XL Series

XL-3/8 signal filters are used for the telephone or other appliances of audio frequency installed in the shielded rooms. XL-384 signal filter is suited for digital communications circuit.

*Technical Data


Rated Voltage	250VDC
Impedance	300/600 Ω
Test Voltage	600VDC(line/line)
Test Voltage	600VDC(line/ground)
Climatic Category	25/070/21

*Outline Drawing and Dimensions:(mm)

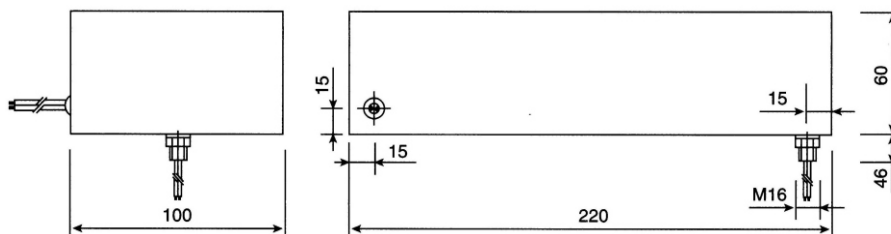

Note: XL-384 screw size = M 24 x 50 Fig1

*Install Schematic Diagram

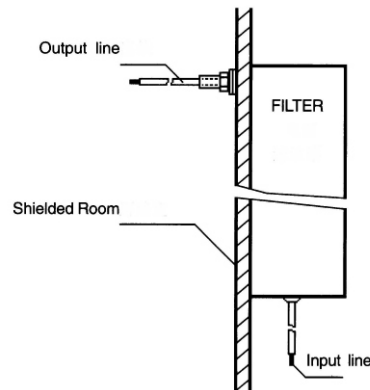

Model DL-	Rated Current (A)	Band pass	Insertion Loss (line to earth)		Dimension FIG.
			Frequency (Hz)	IL (dB)	
XL-3	0.3	0~3.4KHz	14K~10G	100	1
XL-8	0.3	0~7KHz	14K, 25k~10G	60,100	1
XL-384	0.3	0~384KHz	1M~10G	100	1