



## Flash Tubes

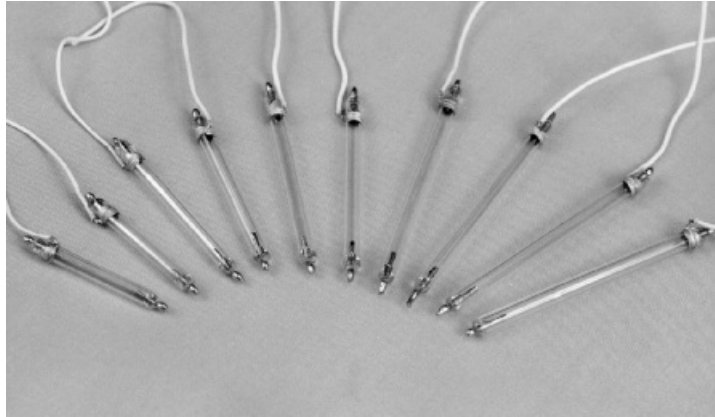

Various straight and special type of flash tubes have been widely used in colour photography as ideal light source.

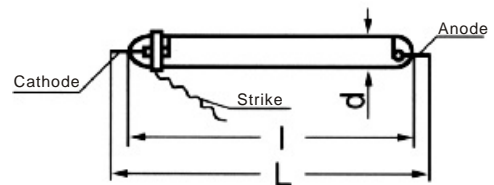


### ● Electrical Characteristics



Type	Cathode-Anode Voltage(v)			Rated Input Energy		Flash Interval Time(s)	Trigger Voltage (kV)	Flash Times	Dimensions(mm)			
	Rated V	Max V	Min V	(J)	(W)				L	l±1.5	d	
Flash Tubes	XMZ3220	330	350	200	8		15	≥5	≥3×10 <sup>3</sup>	25	20	3.2
	XMZ3223	330	350	200	9		15	≥5	≥3×10 <sup>3</sup>	28	23	3.2
	XMZ3225	330	350	200	10		15	≥5	≥3×10 <sup>3</sup>	30	25	3.2
	XMZ3227	330	350	200	11		15	≥5	≥3×10 <sup>3</sup>	32	27	3.2
	XMZ3228	330	350	200	11		15	≥5	≥3×10 <sup>3</sup>	33	28	3.2
	XMZ3230	330	350	210	12		15	≥5	≥3×10 <sup>3</sup>	35	30	3.2
	XMZ3235	330	360	220	15		15	≥5	≥3×10 <sup>3</sup>	41	35	3.2
	XMZ3240	330	360	220	17		15	≥5	≥3×10 <sup>3</sup>	46	40	3.2
	XMZ3245	330	360	230	20		15	≥5	≥3×10 <sup>3</sup>	51	45	3.2
	XMZ3250	330	360	230	22		15	≥5	≥3×10 <sup>3</sup>	56	50	3.2
	XMZ3255	330	360	230	25		15	≥5	≥3×10 <sup>3</sup>	61	55	3.2
	XMZ3260	330	360	230	27		15	≥5	≥3×10 <sup>3</sup>	66	60	3.2
	XMZ3645	330	360	230	25		15	≥5	≥3×10 <sup>3</sup>	51	45	3.6
	XMZ3650	330	360	230	28		15	≥5	≥3×10 <sup>3</sup>	56	50	3.6
	XMZ3656	330	360	230	31		15	≥5	≥3×10 <sup>3</sup>	62	56	3.6
	XMZ3660	330	360	230	34		15	≥5	≥3×10 <sup>3</sup>	66	60	3.6
	XMZ4045	330	360	230	30		15	≥5	≥3×10 <sup>3</sup>	51	45	4.0
	XMZ4055	330	360	230	35		15	≥5	≥3×10 <sup>3</sup>	61	55	4.0
XMZ4060	330	360	230	38		15	≥5	≥3×10 <sup>3</sup>	66	60	4.0	
Stroboscopic Tubes	PSZ3222	330	360	170		1	0.3	≥5	≥1×10 <sup>6</sup>	29	22	3.2
	PSZ3228	330	360	180		1	0.3	≥5	≥1×10 <sup>6</sup>	35	28	3.2
	PSZ3230	330	360	180		1	0.3	≥5	≥1×10 <sup>6</sup>	37	30	3.2
	PSZ3245	330	360	190		2	0.3	≥5	≥1×10 <sup>6</sup>	51	45	3.2
	PSZ3260	330	360	200		3	0.3	≥5	≥1×10 <sup>6</sup>	66	60	3.2
	PSZ3634	330	360	200		3	0.3	≥5	≥1×10 <sup>6</sup>	40	34	3.6

## Stroboscopic Tubes


Stroboscopic tubes are the special light source they are widely used in ballroom ,singing-room,traffic signal and field of science and industrial and agricultural production.



Ring form



Shaped U



Spiral form

### ● Electrical Characteristics

Type		Cathode-Anode Voltage(v)			Rate Input Energy		Flash Interval Time(S)	Trigger Voltage (kV)	Flash Times	Dimensions(mm)					
		Rated	Max	Min	(J)	(W)				H	h	e	d	D	
Flash Tubes	Ring	XMH6016	400	500	300	200		15	$\geq 8$	$\geq 5 \times 10^3$	110	80	16	8	60
		XMH602C	400	500	300	200		15	$\geq 8$	$\geq 5 \times 10^3$	3C	3C	2C	8	3C
		XMH6420	400	500	300	200		15	$\geq 8$	$\geq 5 \times 10^3$	65	35	20	10	64
Stroboscopic Tubes	U	PSU2010	300	400	200		2	0.3	$\geq 6$	$\geq 1 \times 10^6$	4C	2C	1C	5	
		PSU3210	300	400	200		2	0.3	$\geq 6$	$\geq 1 \times 10^6$	65	32	10	5	
		PSU4417	300	400	200		4	0.3	$\geq 6$	$\geq 1 \times 10^6$	75	44	17	6	
		PSU4427	400	500	200		6	0.3	$\geq 6$	$\geq 1 \times 10^6$	75	44	27	6	
	Spiral	PSL3017	300	400	250		6	0.3	$\geq 6$	$\geq 1 \times 10^6$	3C	3C	17	6	
		PSL5020	300	400	250		8	0.3	$\geq 6$	$\geq 1 \times 10^6$	80	50	20	6	
		PSL6025	400	500	300		10	0.3	$\geq 6$	$\geq 1 \times 10^6$	3C	3C	25	8	